


## Acrylic Specialty Coatings

### Star Spectrum

America's Most Trusted
Sealcoating Additives and

**Pavement Protection Products** 



A Bright New Product That Protects, Beautifies And Extends The Life Of Your Asphalt Pavement.



Excellent Durability – STAR SPECTRUM® has been proven as a viable alternative to many traditional pavement coating products. Effective on both asphalt pave-



Non-Hazardous in Application, Handling and Storage. Safe for playgrounds and use where human contact is unavoidable. Easy to apply, clean up and store







**Unique Opportunities** 

**Bike Lane Green** 









**Close Up March 2015** 



Distance 2 Yrs.






**Longevity Test - 2.5 Years** 



Harsh Environment Test
With Powerwaash



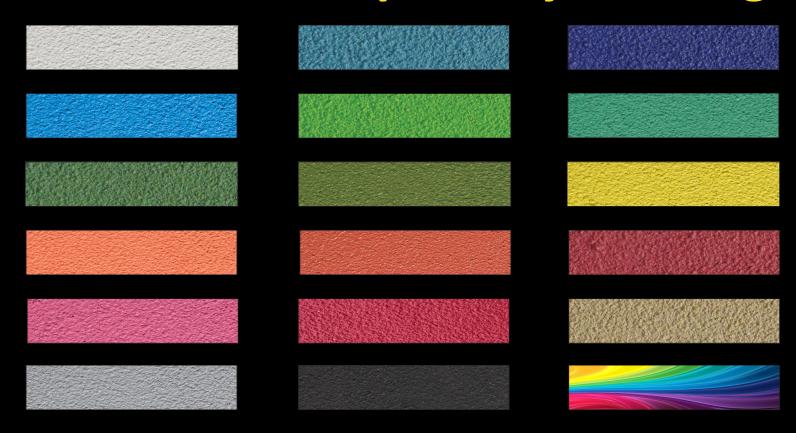



#### MIX DESIGN RECOMMENDATIONS

US METRIC

STAR SPECTRUM® 100 Gal. 100 Liters

Water (Clean, Potable) 5 Gal. 5 Liters

Sand/Aggregate 50-70 AFS\* 300-500 Lbs. 36-60 Kg.

Important - Crushed slag (i.e. Black Beauty) should not be used.

#### **AVERAGE APPLICATION RATES**

Concentrated Sealer - coverage rate of 0.09 - 0.10 Gal./Sq. Yd. or 90 - 100 Sq. Ft./Gal. (2.2 - 2.45 Sq. Meter/Liter).



## STAR SPECTRA PRIME



Specialty water based clear primer, based on 100% acrylic polymers, and special bonding agents which shall be used to assure the adhesion of STAR SPECTRUM to concrete, oldoxidized asphalt and asphalt surfaces with polished aggregates.





## STAR SPECTRA PRIME



#### Water Based

Safe to store and handle Easy to clean up with water

#### **Easy to Apply**

with conventional application tools; brush, roller or spray

#### **Fast Drying**

Dries in 30-45 minutes. Mixed Primer covers approx. 450 – 500 square feet.





# Questions?

# Thank You for your time for watching this presentation.

gcdubey@starseal.com 800-759-1912 www.starseal.com

